




Materials: all materials are UL94V-0 rated

Bobbin and box material: FR530
 UL file number: E69578(M)
 or 'Polyplastics Co. Ltd
 Material name: 1140 A(C)
 UL file no. E109088(M)
 2-part resin type 9001A and 9001B
 UL file number 229633
 or Epoxylite EIP4728: UL file no. E143115
 Winding wire: ECW. UL file no. E174837
 Tape: 3M No. 56 polyester or equivalent

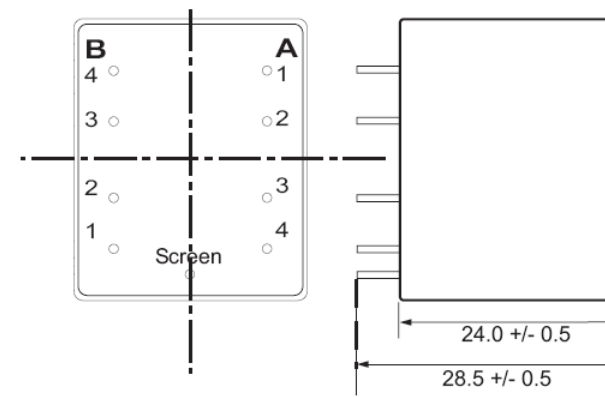

Electrical characteristics:

Winding ratio: 6.3+6.3:1+1
 DC resistance (ohms +/- 15%):
 Primaries: 10.3 + 10.3 Secondaries: 0.37 + 0.37
 Impedance: primaries: 150 ohms + 150 ohms
 secondaries: 3.75 ohms + 3.75 ohms
 Inductance, measured at 1kHz, 0.27V
 (series equivalent circuit):
 Primary: 100mH + 100mH (nominal)
 Secondary: 2.5mH + 2.5mH (nominal)
 Proof voltage: primaries to screen: 1kVrms
 screen to secondaries: 1kV rms
 Frequency range: 30Hz - 35kHz +/- 1.5dB.
 Power: 100mW @ 300Hz and 1mW @ 30Hz
 Distortion: less than 1% T.H.D. 600 ohms 30Hz - 35kHz
 measured at 0dBm
 Operating temperature range: 0 to +70°C
 Fitted in mu-metal screening can
N.B. Do not pass DC through the windings

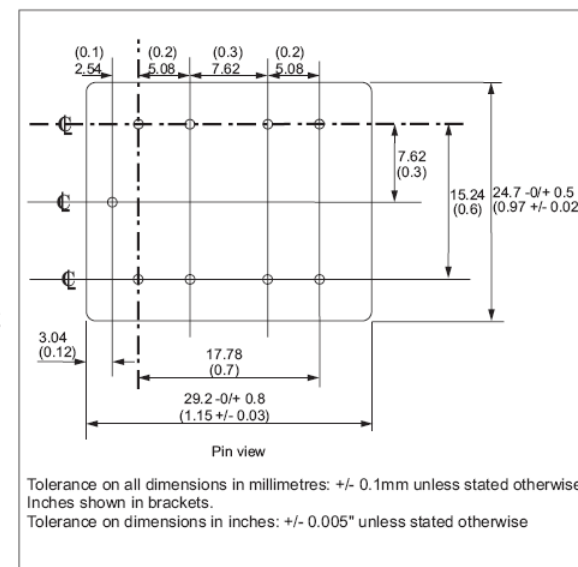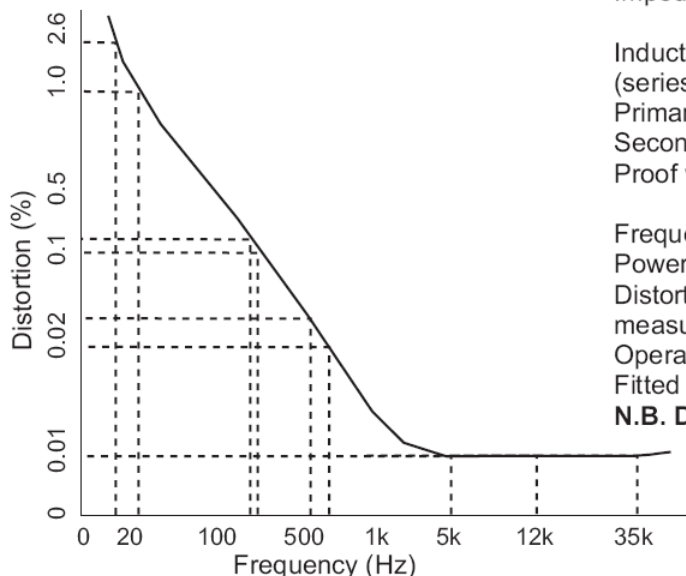

Tolerance on all dimensions in millimetres: +/- 0.1mm unless stated otherwise.
 Inches shown in brackets.
 Tolerance on dimensions in inches: +/- 0.005" unless stated otherwise



OXFORD ELECTRICAL PRODUCTS Ltd.
 15 - 17 Industrial Estate, Wroslyn Road
 Freeland, Witney, Oxon. OX29 8SN
 Tel: (01993) 886200 Fax: (01993) 886210
 Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A1C	1	17/08/98	CS		A262A1C
	2	08/06/05	CS		
	3	10/04/07	CS		
Scale:nts	All dimensions in mm unless stated otherwise				